










Why Oktopus GL-CC 600 DES?

At Lincer, the OKTOPUS® GL-CC 600 DES is your go-to solution for handling glass panes and window elements up to 600 kg. Equipped with a dual-circuit vacuum system and a 24 V DC battery with quick-change capability, it ensures efficiency and safety. Optical and acoustical warnings highlight deviations, and in a complete energy breakdown, the vacuum holds for at least 5 minutes.

This versatile device attaches to mini cranes and truck loader cranes, enabling glazing in difficult areas. The suction frame tilts hydraulically by 120°, rotates electrically by 360°, and swivels by ±35°. Operated via radio remote control, it's perfect for both flat and curved panes. Rely on the OKTOPUS® GL-CC 600 DES for precision and reliability in all your glass handling tasks.




CONFIGURATIONS

-  Mini crane manipulator
-  Fork lift attachment
-  For even glass panes
-  For curved glass panes
-  Rotate 360°
-  Tilt around horizontal axis
-  Radio remote control
-  Tilt around vertical axis (swivel)
-  24 V Battery

OVERVIEW

	Device / suction pads	maximum Working Load Limit	
Working Load Limit	Flat glasses	4 suction pads, Ø 300 mm: up to 300 kg 8 suction pads, Ø 300 mm: up to 600 kg	
	Concavely curved panes (bending radius ≥ 2 m)	12 suction pads, Ø 280 mm: up to 600 kg	
	Convexly curved panes (bending radius ≥ 2 m)	12 suction pads, Ø 280 mm: up to 450 kg	
Weight		<ul style="list-style-type: none"> • Approx. 125 kg with suction frame for flat glasses, 4 pcs. suction pads Ø 300 mm • Approx. 145 kg with suction frame for flat glasses, 8 pcs. suction pads Ø 300 mm • Approx. 170 kg with suction frame for curved glasses, 12 pcs. suction pads Ø 280 mm 	
	Suction pads	<ul style="list-style-type: none"> • 4 / 8 pcs. Ø 300 mm for flat glasses • 12 pcs. Ø 280 mm for curved glasses 	
		Suction frame	<ul style="list-style-type: none"> • 750 * 850 mm with 4 pads for flat glasses, WLL 300 kg • 1,180 * 1,770 mm with 4 / 8 pads for flat glasses, WLL 300 / 600 kg • 1,000 * 1,600 mm with 12 pads for flat glasses, WLL 300 / 600 kg
Vacuum generation	Vacuum pump		
Operation	Radio remote control		
Power supply	Battery quick change system, rechargeable battery, 24 V DC		
Optional facilities	<ul style="list-style-type: none"> • Connecting adapter for telescopic forklift (telehandler) • Spare battery quick change box with battery charger 		
	Optional equipment	<ul style="list-style-type: none"> • Blow-off function • 2-fold speed control • 25 m cable reel 	
Movements		<ul style="list-style-type: none"> • Lifting and lowering: by crane boom or telescopic forklift (telehandler) • Rotating suction frame: electrically, 360° endless • Tilting suction frame around horizontal axis: hydraulically, 120° • Swiveling suction frame around vertical axis (left/right): electrically, $\pm 35^\circ$ 	
	In combination with fork truck adapter	<ul style="list-style-type: none"> • Side shift (left/right): ± 100 mm • Telescopic main boom (forward/backward): 300 mm 	

DIMENSIONS

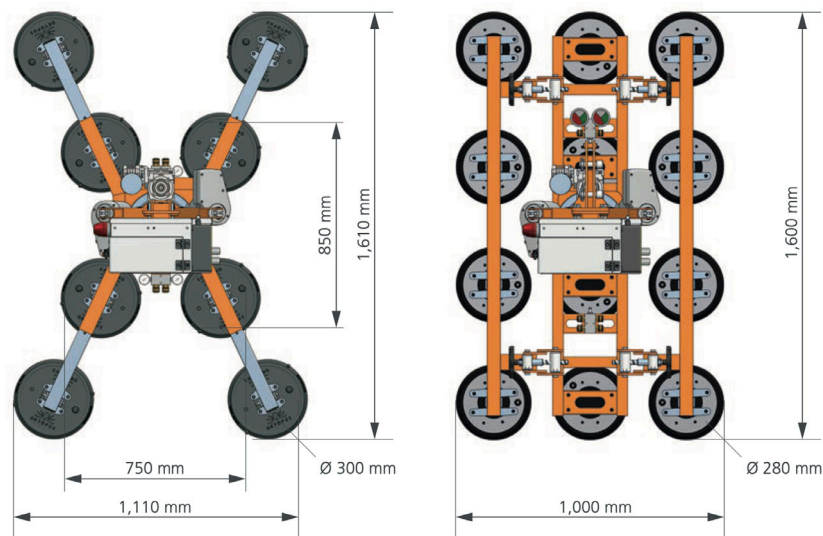

Lincer, Your Equipment Guardian.

Lincer's Services



Inspection and Testing

Our comprehensive Inspection and Testing services for vacuum lifting equipment, and material handling equipment are designed to safeguard your operations and workforce.



Schedule Maintenance

Our commitment is backed by a meticulous schedule, featuring periodic inspections, designed to proactively address any potential issues and keep your lifting equipment in peak condition.



Replacement Equipment

We offer replacement lifting equipment while yours is being serviced, ensuring your operations continue uninterrupted, keeping your projects on track.



Repairs

At Lincer, we specialise in top-tier repair services for lifting equipment. Our certified technicians are adept at addressing any damage, ensuring your equipment operates at its best.



Parts

Discover a comprehensive selection of high-quality lifting equipment parts at Lincer. We offer a wide range of genuine parts to keep your lifting equipment operating at peak performance. Shop with confidence and trust our expertise in providing reliable parts for all your lifting needs.

5 Reasons to choose Lincer

1

Peace of Mind

At Lincer, quality and safety are our top priorities. We provide best-in-class equipment to not just meet but exceed your expectations, ensuring peace of mind for every project.

2

Know-How

Backed by our professional team, which we consider our greatest asset, and fortified by strong industry partnerships, we deliver swift technical services and guarantee compliance with Australian standards, ensuring your operations run smoothly.

3

Lifecycle Management

Let us handle the entire lifecycle of your equipment. From initial sales to ongoing servicing, our end-to-end solutions are designed to optimise your operations and minimize disruptions.

4

Seamless Continuity

With Lincer, downtime is a thing of the past. We offer replacement lifting equipment while yours is being serviced, ensuring your operations continue uninterrupted.

5

Industry Affiliations

Lincer stays at the forefront of the lifting industry, keeping you informed with the latest technical, legal, and safety information. Thanks to our affiliations you can trust that you're always operating with the most up-to-date knowledge and standards.



MARK DOC OKT 0013

CONTACT US

Phone: 0438 419 798

Email: info@lincer.com.au

Address: 2/4 Bostock Court, Thomastown
VIC 3074, Australia

PROUD MEMBER



Find out about our accreditations and services at:

lincer.com.au