



**Your Equipment  
Guardian**

[lincer.com.au](http://lincer.com.au)

# Your Equipment, our priority.

Welcome to Lincer, the premier destination for purchasing and servicing lifting equipment. Let us handle the entire lifecycle of your equipment.

From initial sales to ongoing servicing, our end-to-end solutions are designed to optimise your operations and minimise disruptions.

As an accredited member of the Lifting Equipment Engineers Association (LEEA), we guarantee the highest standards in safety and quality. We are also proud suppliers in Australia of OKTOPUS®, by Wirth, for Vacuum Lifting Equipment.



## PROUD MEMBER



Find out about our accreditations and services at:

[lincer.com.au](http://lincer.com.au)

[Click now to learn more and elevate your experience >](#)



**Explore our promise  
and methodology.  
Learn more about  
who we are and what  
drives us forward.**

## Our Promise

At Lincer, we are committed to delivering unmatched quality, reliability, and support for all your lifting equipment needs. As a trusted supplier of OKTOPUS® vacuum lifters and other specialised lifting solutions, we ensure that every product and service meets the highest safety and performance standards. From initial consultation to after-sales support, our customer-first approach guarantees that your equipment remains efficient, compliant, and ready for any challenge.

## Our Approach

At Lincer, we believe in precision, expertise, and proactive service. Our team of certified technicians and industry specialists thoroughly analyses each piece of equipment to ensure optimal functionality and long-term reliability. Through strategic partnerships, advanced technology, and ongoing innovation, we provide tailored solutions that align with industry best practices and Australian standards. Whether it's equipment sales, servicing, repairs, or inspections, our meticulous attention to detail ensures your operations run smoothly and safely.



# Lincer's Services




## Inspection and Testing

We provide thorough inspections for lifting equipment to catch issues before they cause disruptions onsite. Every component is checked, tested, and certified—ready for immediate use—minimising downtime and avoiding costly delays. With door-to-door pickup across Australia, we make it simple to keep your equipment safe and streamline your asset management.



## Rental Support Equipment

Lincer provides specialised rental support equipment to enhance your lifting operations. From vacuum lifters to material handling solutions, we offer reliable, well-maintained equipment to keep your projects running smoothly. Flexible rental terms and expert support ensure you have the right tools when you need them.

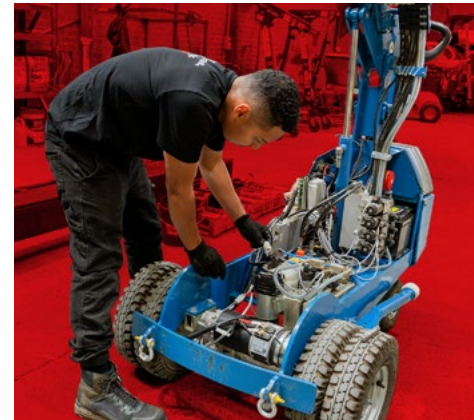

## Repairs

At Lincer, our certified technicians provide expert repair services, ensuring your lifting equipment operates at its best. We conduct a comprehensive analysis to assess the specific repair areas and the overall condition of the machine. Your equipment is transported to our yard for thorough repairs and testing, guaranteeing compliance with Australian and manufacturer standards.





## Lifting Equipment & Parts Supply

Discover high-quality lifting equipment and parts at Lincer. We supply Oktopus products and source components for other leading brands to keep your equipment performing at its best. Lincer helps you by providing fast and reliable delivery straight to your factory.



# Oktopus®



## 1

### Unmatched Quality and Reliability

OKTOPUS® is a trusted name known for its high-quality engineering and adherence to industry standards. Every piece of equipment is designed for durability and dependable performance, making it a valuable addition to any fleet.

## 2

### Transparent After-Sales Maintenance

Lincer carries out the necessary inspections and maintenance recommended by the manufacturer. With OKTOPUS®, there are no major costs, and Lincer ensures compliance with all standards to keep your equipment in top condition.

## 3

### True Lifting Capacity

OKTOPUS® models lead their category in lifting capacity, delivering a true performance that meets or exceeds expectations, ensuring that your operations run smoothly and efficiently.

## 4

### Versatility for Any Task

Selected OKTOPUS® models are configurable with various attachments, including remote controls. Whether handling curved surfaces or challenging materials, OKTOPUS® provides solutions tailored to a wide range of lifting needs.

## 5

### Adaptable Across Industries

From construction sites to manufacturing installations, OKTOPUS® enhances productivity and efficiency across multiple industries, proving its value in factories and on-site operations alike.

## 6

### The Safest Vacuum Lifter

OKTOPUS® sets the standard for safety, reliability, and performance, featuring high-quality components, redundant vacuum circuits, and real-time monitoring. With visual and audible alerts, non-slip suction pads, and emergency backup systems, it ensures secure and fail-safe lifting.

# Lincer, The New Name in Vacuum Lifting Technology.



OKTOPUS





# Glass Handling











## Glass Handling

# GL-LN 400



### Features

-  Crane attachment
-  For even glass panes
-  Manual operation
-  Rotate 360°
-  Blow-off
-  Tilt around horizontal axis
-  24 V Battery
-  Hydraulic lowering cylinder


Introducing the OKTOPUS® GL-LN 400, effortless handling of long, narrow glass panes with 360° rotation, 90° tilt, and advanced safety features. Ergonomic controls and reliable power ensure efficiency.



## Overview


Working Load Limit	4 suction pads Ø 400 mm up to 400 kg
Weight	Approx. 45 kg
Suction pads	4 pcs. Ø 400 mm
Vacuum generation	Electrical vacuum pump
Operation	Operating lever on the device
Vacuum system	Dual-circuit vacuum system for construction site use
Nom. pres. pneumatic system	-0.65 bar to -0.73 bar
Power supply	24 V DC battery system
Optional equipment	• Transport box
Optional facilities	• Blow-off system
	• Crane arm with hydraulic lowering cylinder
Movements	• Lifting and lowering: By the crane hook
	• Rotating horizontally: In the crane hook, manually 360°
	• Rotation of the suction frame: Manually 360°, lockable every 90°
	• Tilting the suction frame: Manually, 0-90°

## Dimensions

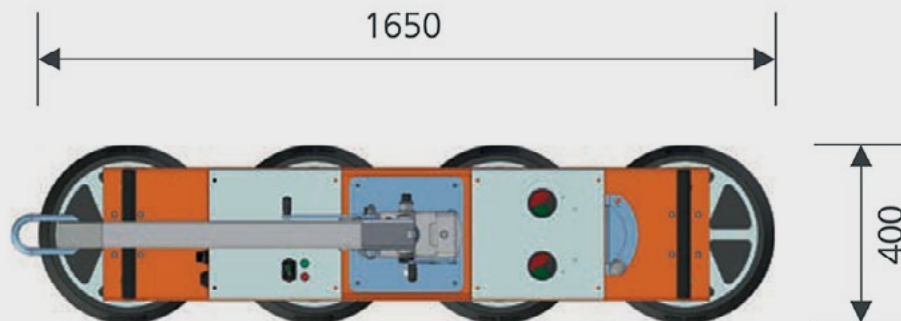





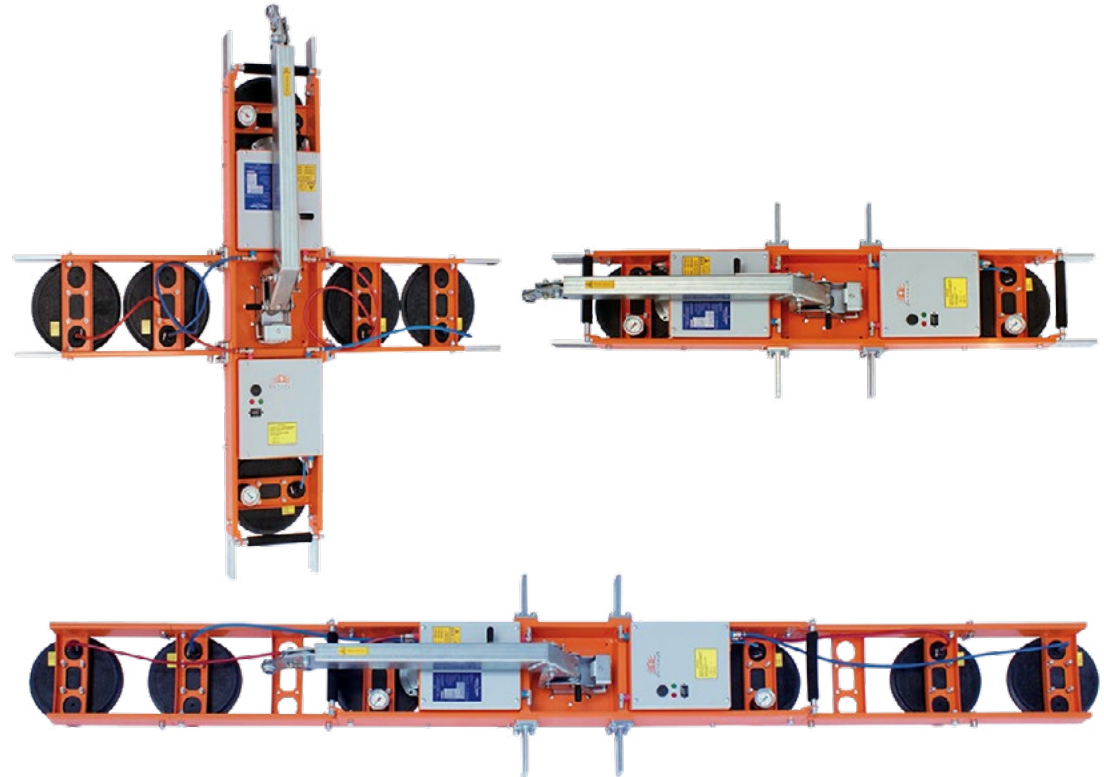



## Glass Handling

# GL-LN 600



### Features

-  Crane attachment
-  For even glass panes
-  Manual operation
-  Rotate 360°
-  Blow-off
-  Tilt around horizontal axis
-  24 V Battery
-  Hydraulic lowering cylinder


The OKTOPUS® GL-LN 600 lifts glass up to 600 kg with 360° rotation, 90° tilting, and easy crane attachment. It ensures precise, safe, and reliable operation.



## Overview


Working Load Limit	4 suction pads Ø 300 mm up to 300 kg
	6 suction pads Ø 300 mm up to 450 kg
	8 suction pads Ø 300 mm up to 600 kg
Weight	Depending on the configuration approx. 60 kg - 95 kg
Suction pads	4, 6 or 8 pcs. Ø 300 mm
Vacuum generation	Electrical vacuum pump
Operation	Operating lever on the device
Vacuum system	Dual-circuit vacuum system for construction site use
Nominal pressure pneumatic system	-0.65 bar to -0.73 bar
Power supply	24 V DC battery system
Optional facilities	• Blow-off function
	• Crane arm with hydraulic lowering cylinder
Optional equipment	• Crane mounting horizontal
	• Transport box
Movements	• Lifting and lowering: By the crane hook
	• Rotating horizontally: In the crane hook, manually 360°
	• Rotation of the suction frame: Manually 360°, lockable every 45°
	• Tilting the suction frame: Manually 0-90°

## Dimensions

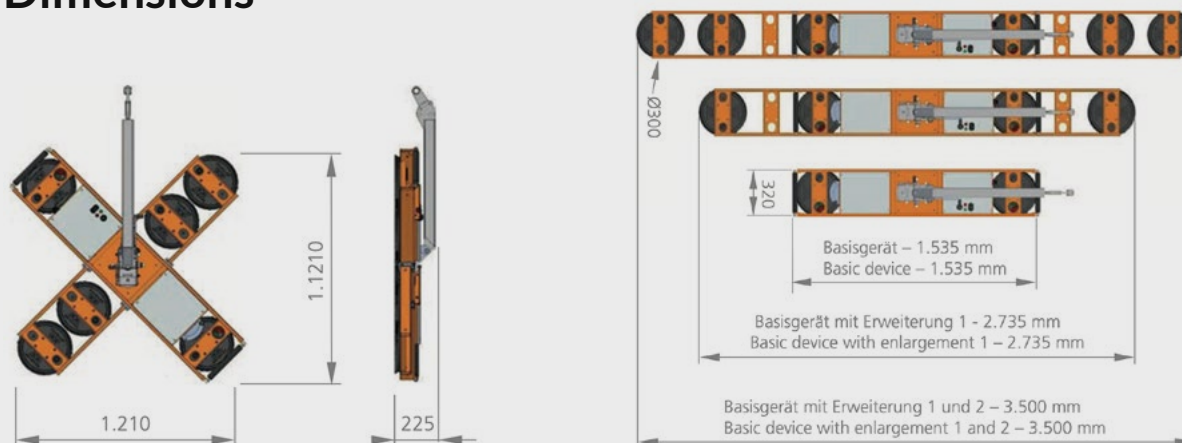





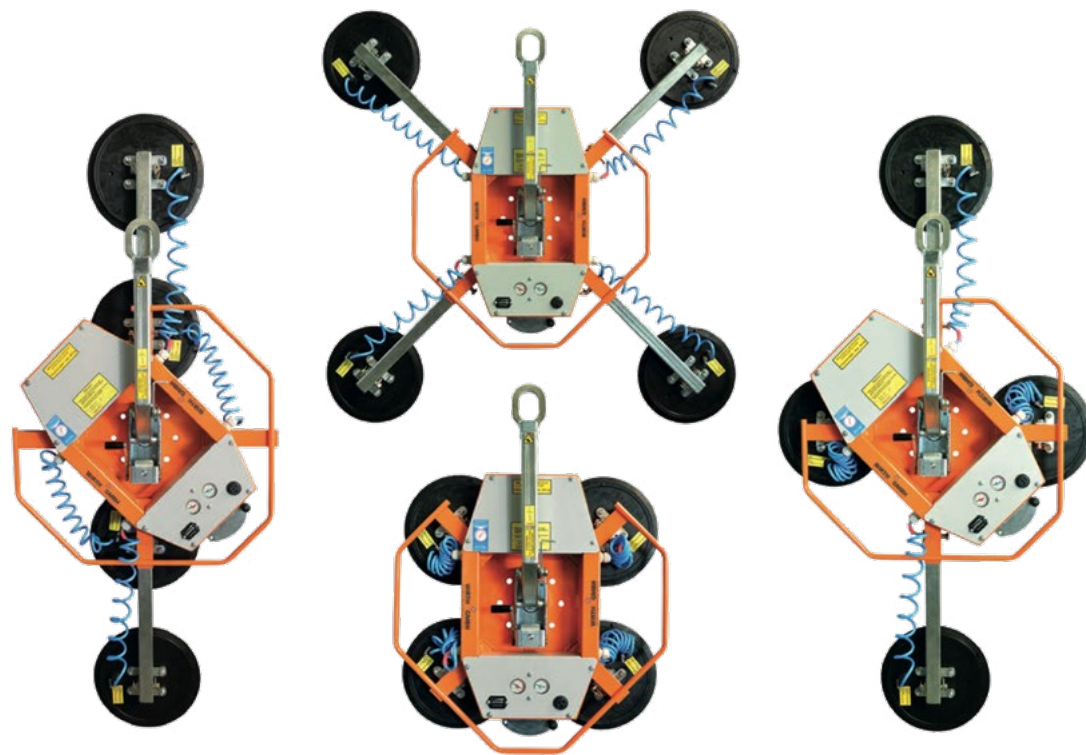


## Glass Handling

# GL-N 400/300



## Features

-  Crane attachment
-  For even glass panes
-  Manual operation
-  Rotate 360°
-  Blow-off
-  Tilt around horizontal axis
-  24 V Battery


Introducing the OKTOPUS® GL-N 400/300, a compact, versatile lifter for tight spaces, handling up to 400 kg horizontally and 300 kg vertically, with advanced safety features.



## Overview


<b>Working Load Limit</b>	4 suction pads Ø 300 mm horizontal up to 400 kg
	4 suction pads Ø 300 mm vertical up to 300 kg
<b>Weight</b>	Depending on the configuration approx. 35 - 45 kg
<b>Suction pads</b>	4 pcs. Ø 300 mm
<b>Vacuum generation</b>	Electrical vacuum pump
<b>Operation</b>	Operating lever on the device
<b>Vacuum system</b>	Dual-circuit vacuum system for construction site use
<b>Nom. pres. pneumatic system</b>	-0.65 bar to -0.73 bar
<b>Power supply</b>	24 V DC battery system
<b>Optional facilities</b>	Blow-off function
<b>Optional equipment</b>	Transport box
	<ul style="list-style-type: none"> <li>Lifting and lowering: By the crane hook</li> </ul>
<b>Movements</b>	<ul style="list-style-type: none"> <li>Rotating horizontally: In the crane hook, manually 360°</li> </ul>
	<ul style="list-style-type: none"> <li>Rotation of the suction frame: Manually 360°, lockable every 45°</li> </ul>
	<ul style="list-style-type: none"> <li>Tilting the suction frame: Manually, 0-90°</li> </ul>

## Dimensions

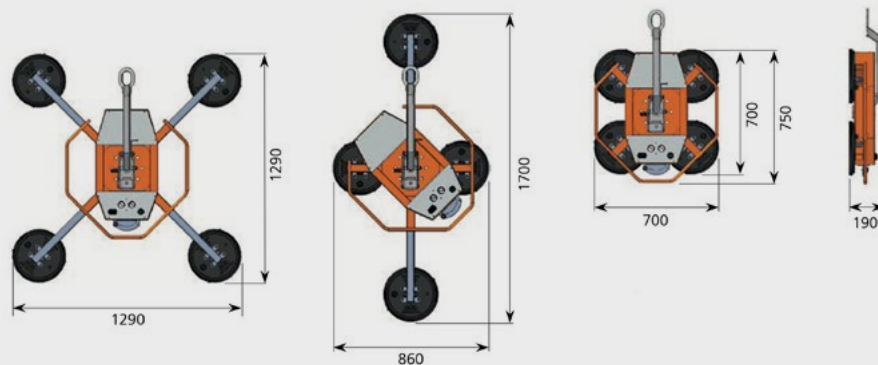





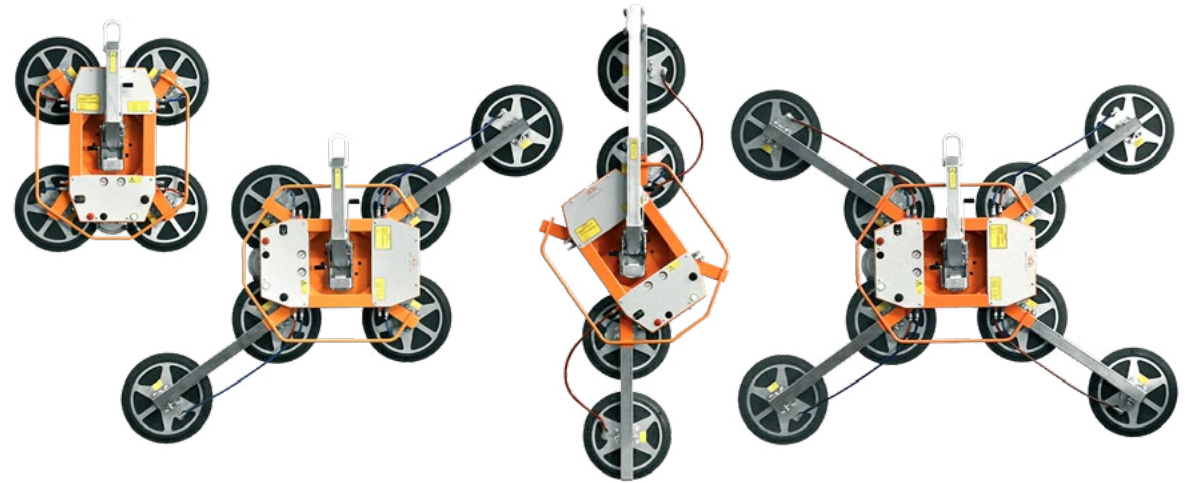







## Glass Handling

# GL-N 800



### Features

-  Crane attachment
-  For even glass panes
-  Manual operation
-  Rotate 360°
-  24 V Battery
-  Radio remote control
-  For curved glass panes
-  Tilt 90° with locking function (18°)
-  Blow-off
-  Adjustable crane arms
-  Control panel at the device / cable remote control
-  Can be combined with counterweight balancers


The OKTOPUS® GL-N 800 handles glass up to 800 kg with precision, offering curved pane adaptability, dual vacuum safety, and advanced energy-saving features. Efficient and reliable for diverse construction needs.



## Overview


<b>Working Load Limit</b>	Flat glasses: 400/600/800 kg (4/6/8 suction pads Ø 400 mm) Convex/concav curved glasses: 320 kg (14 suction pads Ø 200 mm)
<b>Weight</b>	For flat glasses: depending on number of suction pads and extension arms: 60 till 90 kg for Convex/concave curved glasses: 90 kg
<b>Suction pads</b>	4 / 6 / 8 pcs. Wirth Ø 400 mm respectively 14 pcs. Wirth Ø 200 mm
<b>Vacuum generation</b>	Electrical vacuum pump
<b>Operation</b>	Manually operated safety valves / operation tableau at the device with or without cable remote control / radio remote control
<b>Vacuum system</b>	2 independent vacuum circuits each vacuum circuit with 2-fold safety and integrated vacuum reservoir
<b>Nominal pressure pneumatic system</b>	working range from -0.65 bar to -0.9 bar
<b>Power supply</b>	24 V battery
<b>Optional facilities</b>	<ul style="list-style-type: none"> <li>• adjustable crane arm</li> <li>• inclination-adjustable crane eye to optimise the centre of gravity position</li> <li>• swivel movement with locking function in 18° increments (optional)</li> <li>• blow-off function</li> <li>• possibility of connecting a counterweight system</li> <li>• optionally with manually operated valves, cable remote control or radio remote control</li> </ul>
<b>Movements</b>	Lifting and lowering: by the crane hook Rotating horizontally: 360° Tilt 90°, optional with locking function in 18° increments
<b>Optional equipment</b>	<ul style="list-style-type: none"> <li>• transport cart, big</li> <li>• transport cart small, 2-part</li> <li>• transport box</li> </ul>

## Dimensions

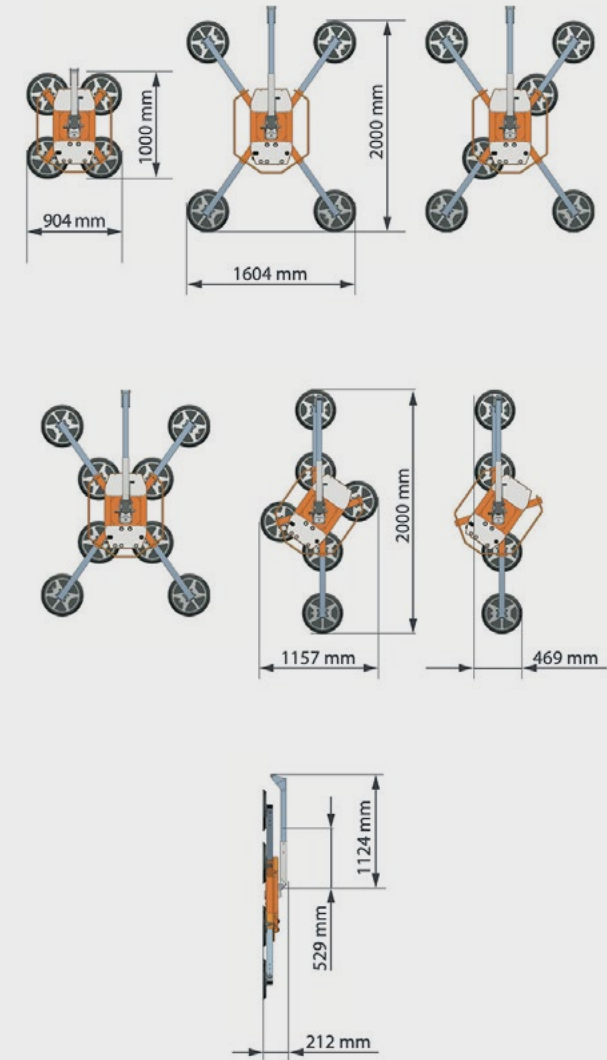





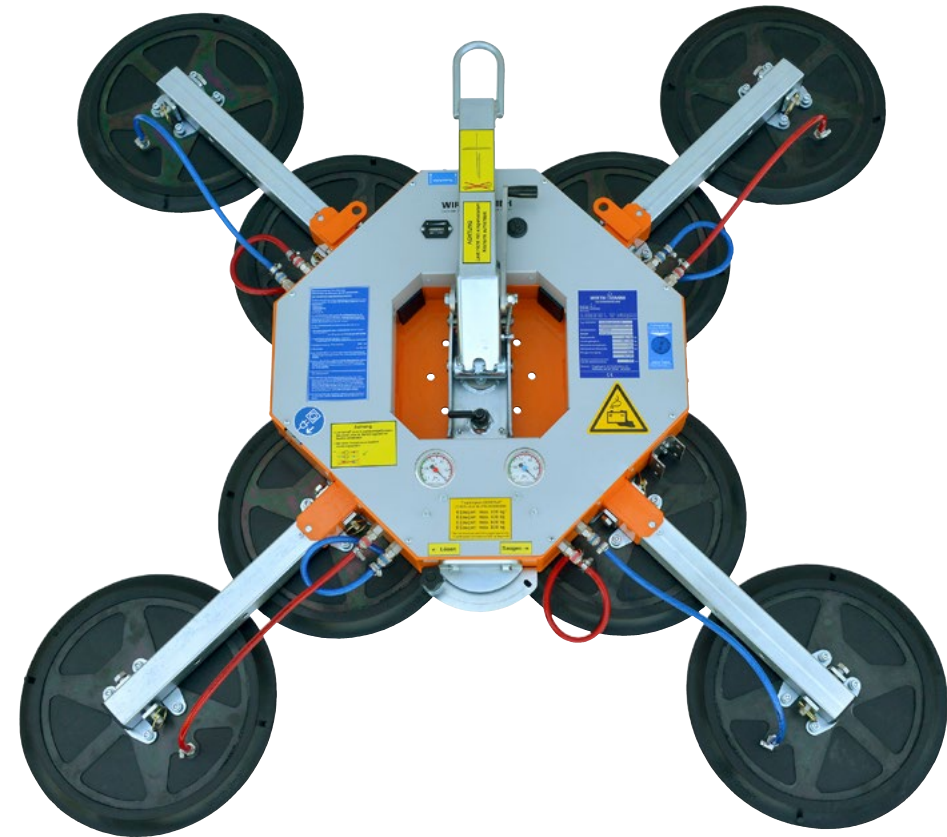




## Glass Handling

# GL-RN 400/600/800



### Features




- |  |  |  |
|--|--|--|
|  Crane attachment |  For even glass panes   |  Manual operation                                   |
|  Rotate 360°      |  For curved glass panes |  Tilt around horizontal axis                        |
|  24 V Battery     |  Radio remote control   |  Control panel at the device / cable remote control |

The OKTOPUS® GL-RN 400/600/800 handles glass panes up to 800 kg, weighing just 55-80 kg. Optional adapters enable curved pane handling up to 320 kg with bending radii  $\geq 1000$  mm.

## Overview

	Device / suction pads	maximum Working Load Limit
Working Load Limit	4 suction pads Ø 400 mm (with and without guide ring)	up to 400 kg (flat glass panes)
	6 suction pads Ø 400 mm	up to 600 kg (flat glass panes)
	8 suction pads Ø 400 mm	up to 800 kg (flat glass panes)
	14 suction pads Ø 200 mm	up to 320 kg (flat glass panes and curved glass panes)
Weight	Depending on the equipment 55 kg - 80 kg	
Suction pads	4, 6 or 8 pieces Ø 400 mm for flat glass panes 14 pieces Ø 200 mm for curved glass panes	
Vacuum generation	Electrical vacuum pump	
Operation	Operating lever on the device	
Vacuum system	Dual-circuit system for construction site use	
Nominal pressure pneumatic system	-0,65 bar to -0,73 bar	
Power supply	24 V DC battery system	
Optional facilities and equipment	<ul style="list-style-type: none"> <li>Adjustable crane arm</li> <li>Crane arm with hydraulic lowering cylinder</li> <li>Blow-off function</li> <li>Guide ring</li> <li>Cable remote control</li> <li>Radio remote control</li> <li>Preparation of basic device for operating a counterweight balancer</li> </ul>	
Optional equipment	<ul style="list-style-type: none"> <li>Adapter for handling curved glass panes (<math>r \geq 1,000</math> mm)</li> <li>Transport cart (two models available)</li> <li>Transport box with lid</li> </ul>	
Movements	<ul style="list-style-type: none"> <li>Lifting and lowering: by the crane hook</li> <li>Rotating horizontally: in the crane hook, manually 360°</li> <li>Rotating suction frame: manually 360°, lockable in the grid every 45°</li> <li>Tilting suction frame: manually 0-90°</li> </ul>	
Extra technical details	<ul style="list-style-type: none"> <li>Deviations from the nominal condition are indicated by optical and acoustical warning devices</li> <li>Integrated pressure switch control indicating malfunctions</li> <li>Energy-self-sufficient indicator for interruptions in energy supply</li> <li>Pressure switch controlled energy saving function to reduce pump running times and increase operating times of the devices</li> <li>Extension arms allow handling of large-sized elements as well</li> <li>Compliance with all criteria of DIN EN 13155</li> <li>CE mark according to European Machinery Directive 2006/42/EC</li> </ul>	

## Dimensions

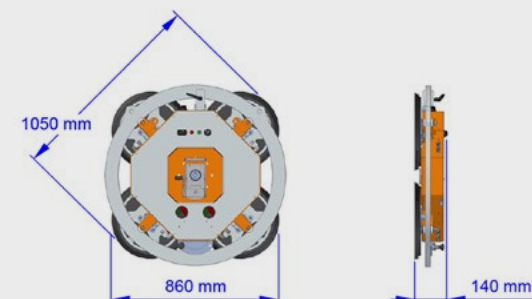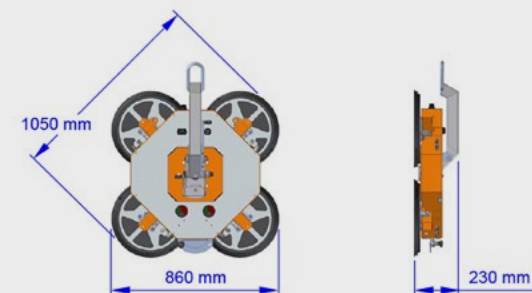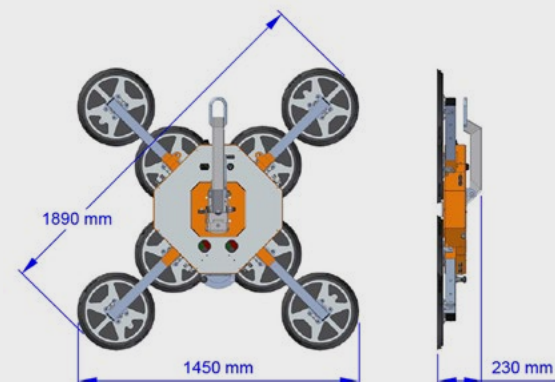



## Glass Handling

# GL-CC 600 DES



## Features



Mini crane  
manipulator



Fork lift  
attachment



For even  
glass panes



Rotate 360°



For curved  
glass panes



Tilt around  
horizontal axis



Battery



Radio remote  
control





Tilt around vertical  
axis (swivel)

The OKTOPUS® GL-CC 600 DES handles glass panes up to 600 kg with dual-circuit vacuum and quick-change battery. It tilts, rotates, and swivels for precision, ideal for challenging glazing tasks.

## Overview

	Device / suction pads	maximum Working Load Limit
Working Load Limit	Flat glasses	4 suction pads, Ø 300 mm: up to 300 kg 8 suction pads, Ø 300 mm: up to 600 kg
	Concavely curved panes (bending radius $\geq 2$ m)	12 suction pads, Ø 280 mm: up to 600 kg
	Convexly curved panes (bending radius $\geq 2$ m)	12 suction pads, Ø 280 mm: up to 450 kg
Weight		• Approx. 125 kg with suction frame for flat glasses, 4 pcs. suction pads Ø 300 mm
		• Approx. 145 kg with suction frame for flat glasses, 8 pcs. suction pads Ø 300 mm
		• Approx. 170 kg with suction frame for curved glasses, 12 pcs. suction pads Ø 280 mm
Suction pads		• 4 / 8 pcs. Ø 300 mm for flat glasses
		• 12 pcs. Ø 280 mm for curved glasses
Suction frame		• 750 * 850 mm with 4 pads for flat glasses, WLL 300 kg
		• 1,180 * 1,770 mm with 4 / 8 pads for flat glasses, WLL 300 / 600 kg
		• 1,000 * 1,600 mm with 12 pads for flat glasses, WLL 300 / 600 kg
Vacuum generation	Vacuum pump	
Operation	Radio remote control	
Power supply	Battery quick change system, rechargeable battery, 24 V DC	
Optional facilities		• Connecting adapter for telescopic forklift (telehandler)
		• Spare battery quick change box with battery charger
		• Blow-off function
Optional equipment		• 2-fold speed control
		• 25 m cable reel
Movements		• Lifting and lowering: by crane boom or telescopic forklift (telehandler)
		• Rotating suction frame: electrically, 360° endless
		• Tilting suction frame around horizontal axis: hydraulically, 120°
		• Swiveling suction frame around vertical axis (left/right): electrically, $\pm 35^\circ$
In combination with fork truck adapter		• Side shift (left/right): $\pm 100$ mm
		• Telescopic main boom (forward/backward): 300 mm

## Dimensions

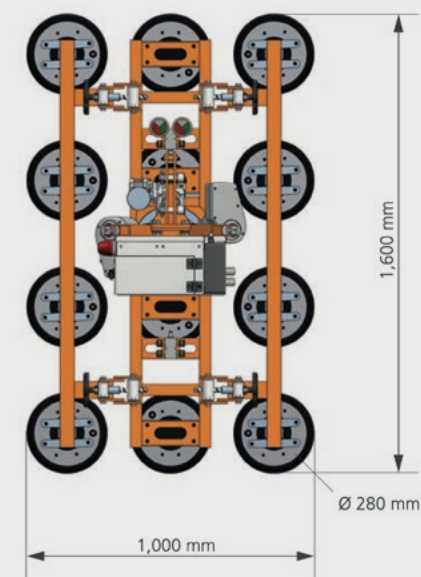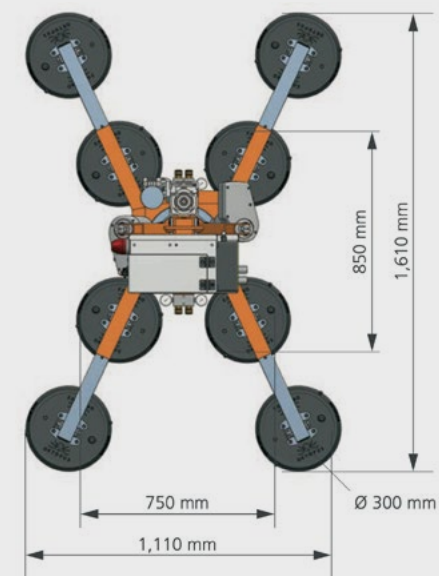

## Glass Handling

# GL-CC 1200 DES



## Features



Mini crane  
manipulator



Fork lift  
attachment



For even  
glass panes



Rotate 360°



For curved  
glass panes



Tilt around  
horizontal axis



Battery



Radio remote  
control



Tilt around vertical  
axis (swivel)



Side stroke



Telescopic boom/  
crane arm/lifting  
column



The OKTOPUS® GL-CC 1200 DES from Lincer handles 1,200 kg glass panes, tilts, rotates, and swivels for precision. It ensures safety with a dual-circuit vacuum and remote control operation.



## Overview


	Device / suction pads	maximum Working Load Limit
Working Load Limit	Flat glasses	8 suction pads, Ø 400 mm: up to 800 kg 12 suction pads, Ø 400 mm: up to 1,200 kg
	Concavely curved panes (bending radius $\geq 2$ m)	20 suction pads, Ø 280 mm: up to 1,000 kg
	Convexly curved panes (bending radius $\geq 2$ m)	20 suction pads, Ø 280 mm: up to 1,000 kg
Weight		• Approx. 210 kg with suction frame for flat panes 8 pcs. suction pads Ø 400 mm
		• Approx. 240 kg with suction frame for flat panes 12 pcs. suction pads Ø 400 mm
		• Approx. 285 kg with suction frame for curved panes 20 pcs. suction pads Ø 280 mm
Suction pads		• 8 or 12 pcs. Ø 400 mm for flat panes
		• 20 pcs. Ø 280 mm for curved panes
		• Others on request
Suction frame		• 1,500 * 1,100 mm with 8 suction pads for flat glass panes, Working Load Limit max. 800 kg
		• 2,400 * 1,530 mm with 12 suction pads for flat glass panes, Working Load Limit max. 1,200 kg
		• 2,200 * 1,000 mm with 20 suction pads for curved glass panes, Working Load Limit max. 1,000 kg
Vacuum generation	Vacuum pump	
Operation	Radio remote control	
Power supply	Battery quick change system, rechargeable battery, 24 V DC	
Optional facilities	• Connecting adapter for telescopic forklift (telehandler)	
	• Spare battery quick change box with battery charger	
	• Blow-off function	
Optional equipment	• Technical documentation	
	• Battery charger	
	• Spare battery quick change box	
Movements	• Lifting and lowering: by crane boom or telescopic forklift (telehandler)	
	• Rotating suction frame: electrically, 360° endless	
	• Tilting suction frame around horizontal axis: hydraulically, 120°	
	• Swiveling suction frame around vertical axis (left/right): electrically, $\pm 40^\circ$	
In combination with fork truck adapter	• Side shift (left/right): $\pm 100^\circ$	
	• Telescopic main boom (forward/backward): 300 mm	

## Dimensions

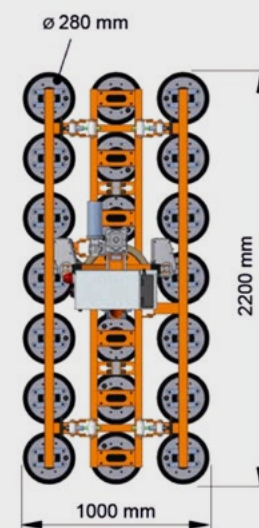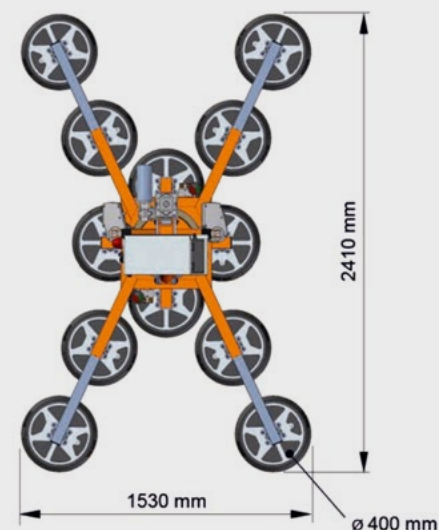





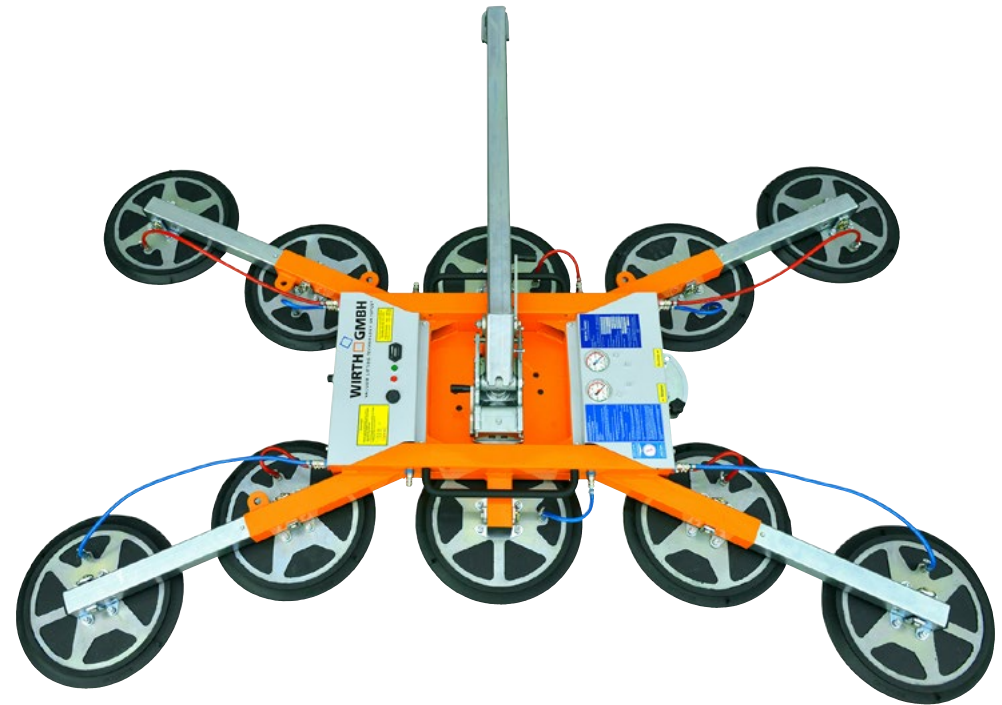








## Glass Handling

# GL-KN 1000



### Features


-  Crane attachment
-  For even glass panes
-  For curved glass panes
-  Rotate 360°
-  Tilt 90° with locking function (18°)
-  Blow-off function
-  Tilt around horizontal axis
-  Can be combined with counterweight balancers
-  24 V Battery
-  Hydraulic lowering cylinder
-  Radio remote control
-  Control panel at the device / cable remote control
-  Manual operation

The OKTOPUS® GL-KN 1000, available at Lincer, handles large glass panes up to 1000 kg, with features like extension arms, jerk-free lowering, and curved glass handling, ensuring safety and efficiency.

## Overview

	Device / suction pads	maximum Working Load Limit
Working Load Limit	10 suction pads Ø 400 mm	up to 1000 kg (flat glass panes)
	16 suction pads Ø 280 mm	up to 800 kg (flat glass panes and curved glass panes)
Weight	Depending on the equipment ca. 90 kg - 180 kg	
Suction pads	10 pcs. Ø 400 mm and 16 pcs. Ø 280 mm	
Vacuum generation	Electrical vacuum pump	
Operation	Operating lever on the device	
Vacuum system	Dual-circuit system for construction site use	
Nominal pressure pneumatic system	-0,65 bar to -0,73 bar	
Power supply	24 V DC battery system	
Optional facilities and equipment	<ul style="list-style-type: none"> <li>• Crane arm with hydraulic lowering cylinder</li> <li>• Blow-off function</li> <li>• Cable remote control</li> <li>• Radio remote control</li> <li>• Preparation of the basic device to operate a counterweight balancer</li> </ul>	
	<ul style="list-style-type: none"> <li>• Adapter for handling curved glass panes (R =&gt; 2,000 mm)</li> </ul>	
	<ul style="list-style-type: none"> <li>• Transport cart, large with forklift adapter</li> <li>• Transport cart small, two-piece</li> </ul>	
Movements	<ul style="list-style-type: none"> <li>• Lifting and lowering: by the crane hook</li> </ul>	
	<ul style="list-style-type: none"> <li>• Rotating horizontally: in the crane hook, manually 360°</li> </ul>	
	<ul style="list-style-type: none"> <li>• Rotation suction frame: manually 360°, lockable every 45°</li> </ul>	
	<ul style="list-style-type: none"> <li>• Tilting suction frame: manually 0-90°, optional with locking function in 18° increments</li> </ul>	

## Dimensions

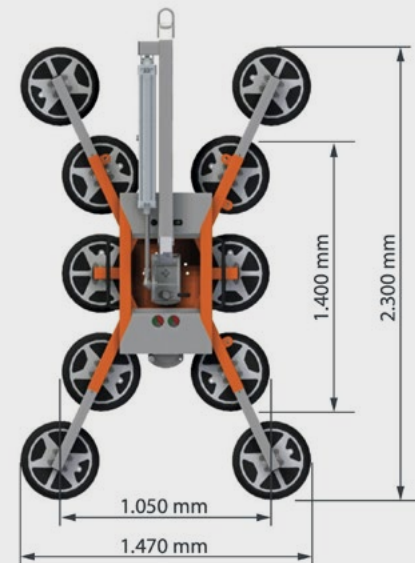



# Got a question?

Feel free to reach out to us at **0438 419 798**  
or send us an email at **[info@lincer.com.au](mailto:info@lincer.com.au)**

Our friendly team is here and ready to assist you!

**[lincer.com.au](https://lincer.com.au)**

